



Directional Flat Panel Antenna



- Model: FTD-1727PB08DP65B
- Name: Directional Flat Panel Antenna
- Freq.Range: 1710 to 2170 / 2300 to 2690 MHz
- Communications system: WIFI/WLAN/ISM, TD-SCDMA/WCDMA/TDD&FDD-LTE, Mobile communication wireless network optimization
- Application scenario: Point to point, Point to multipoint, Repeater antenna, Wireless data and image transmission, Outdoor signal directional coverage, Cell Signal Coverage

Tip: Pictures are for reference only.
Please refer to physical objects.

Electrical Specifications


Freq.Range-MHz	1710 to 2170	2300 to 2690
Bandwidth-MHz	460	390
Polarization	±45°	
Gain-dBi	7.5	8
Beam Electrical Downtilt-°	0	
Half-power beam width-°	H:60 E:55	H:65 E:55
Cross-pol-isolation-dB	≥ 20	
F/B-dB	≥ 20	
Impedance-Ω	50	
VSWR	≤ 1.7	
Max.Power-W	50	
Lightning Protection	DC Grounded	

Mechanical Specifications

Connector	2×N female or Customized
Connector Position	Cable outgoing
Dimension-MM	About 140×120×40
Weight-KG	About 0.5
Radome material	ABS
Radome color	White
Mechanical tilt-°	0 to 30
Operational Temperature-°C	-40 to 60
Storage Temperature-°C	-55 to 85
Relative Humidity-%	5 to 95
Rated Wind Velocity-M/S	60
Mounting way	Mast
Mast Diameter-MM	Φ30 to 50



Installation Demonstrations

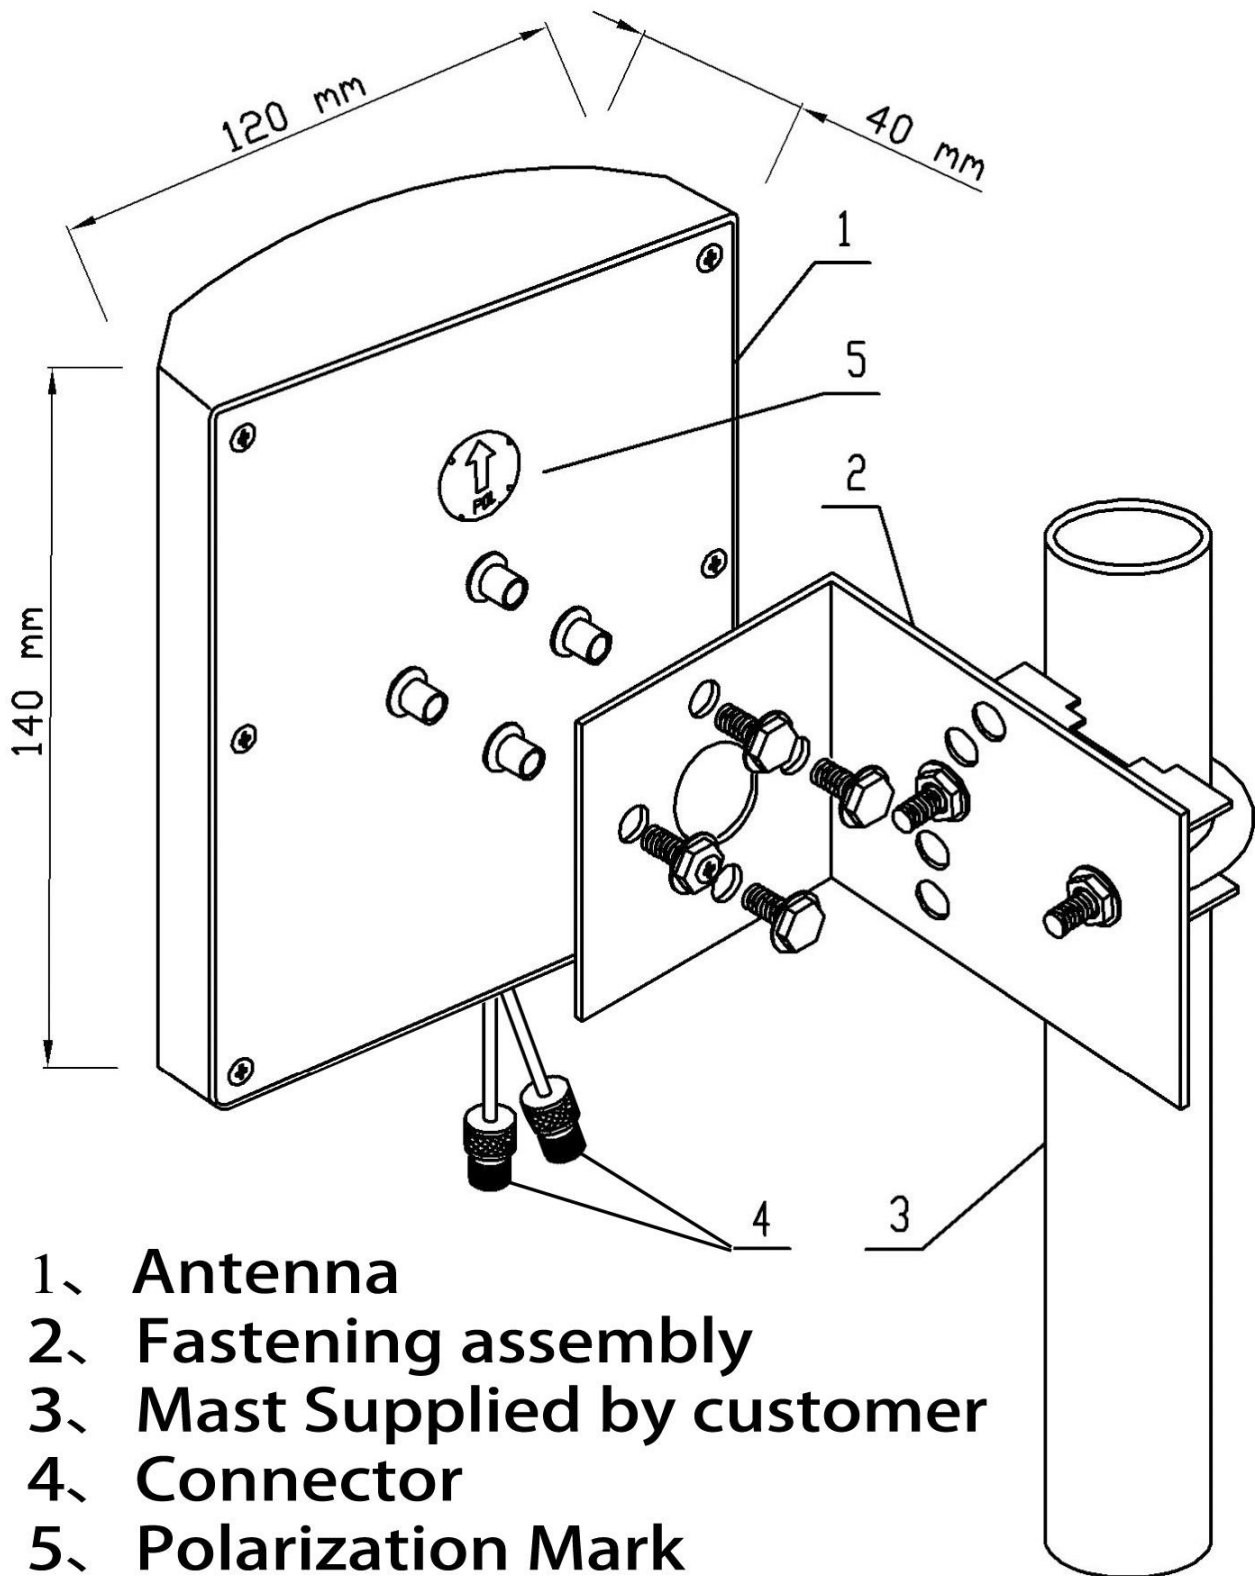

- 1、 Antenna
- 2、 Fastening assembly
- 3、 Mast Supplied by customer
- 4、 Connector
- 5、 Polarization Mark