



## Directional Sector Antenna



Tip: Pictures are for reference only.  
Please refer to physical objects.

- Model: FTD-1738SH1515VP65A
- Name: Directional Sector Antenna
- Freq.Range: 1710 to 2690 / 3300 to 3800 MHz
- Communications system: WLAN/WIFI/ISM, CDMA/EGSM/DCS1800/MMDS/5G, TD-SCDMA/WCDMA/TDD&FDD-LTE, Wireless access communication system, Wireless cellular Communication System, Public wireless hotspot coverage
- Application scenario: Point to multipoint, Repeater antenna, Base station antenna, Wireless data and image transmission, Outdoor signal directional coverage

### Electrical Specifications


Freq.Range-MHz	1710 to 2690	3300 to 3800
Bandwidth-MHz	980	500
Polarization	Vertical	
Gain-dBi	14.5	15
Beam Electrical Downtilt-°	0	
Half-power beam width-°	H:65 E:15	H:60 E:12
First upper sidelobe suppression-dB	N/A	
Third-order passive intermodulation-dBc	≤-150dBc (2×43dBm )	
F/B-dB	≥ 25	
Impedance-Ω	50	
VSWR	≤ 2.0	
Max.Power-W	100	
Lightning Protection	DC Grounded	

### Mechanical Specifications

Connector	N female
Connector Position	Bottom
Dimension-MM	About 500×160×80
Weight-KG	About 3
Radome material	UPVC
Radome color	Gray
Mechanical tilt-°	0 to 15
Operational Temperature-°C	-40 to 60
Storage Temperature-°C	-55 to 85
Relative Humidity-%	5 to 95
Rated Wind Velocity-M/S	60
Mounting way	Mast
Mast Diameter-MM	Φ50 to 75




## Installation Demonstrations

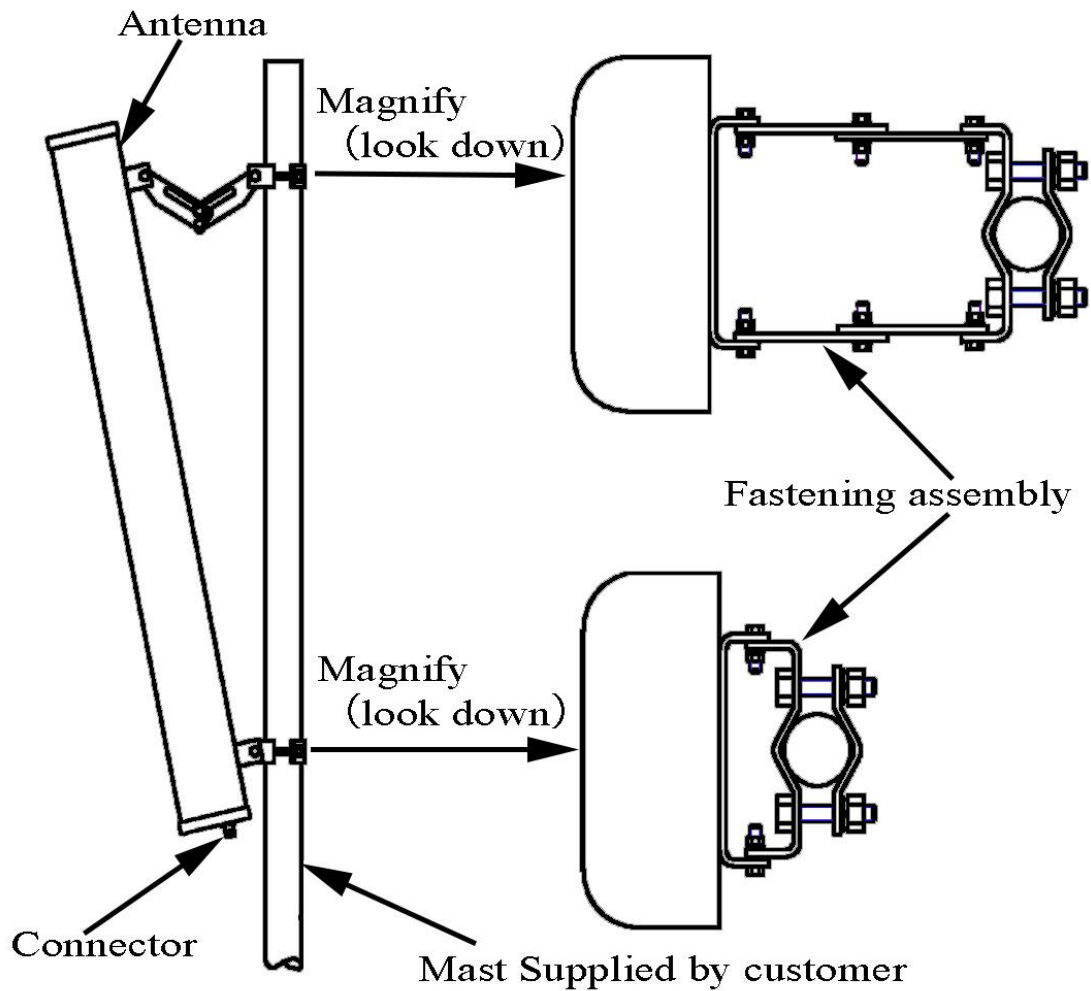

## Typical pattern

1710 to 2690MHz

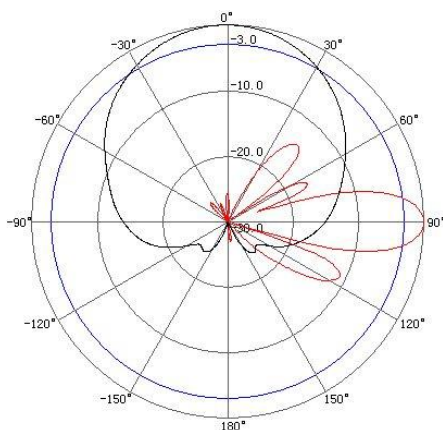

3300 to 3800MHz

