



Camouflage Antenna



- Model: FTD-24MHKG07V80
- Name: Camouflage Antenna
- Freq.Range: 2400 to 2500 MHz
- Communications system:
 - 2.4GHz WLAN/WIFI/ISM/RFID,
 - Spread Spectrum Communication,
 - Indoor distributed communication system
- Application scenario:
 - Wireless data and image transmission,
 - Public wireless hotspot coverage,
 - Indoor signal directional coverage,
 - IEEE802.11b/g


Tip: Pictures are for reference only.
Please refer to physical objects.

Electrical Specifications	
Freq.Range-MHz	2400 to 2500
Bandwidth-MHz	100
Polarization	Vertical
Gain-dBi	7
Half-power beam width-°	H:80 E:60
F/B-dB	≥ 20
Impedance-Ω	50
VSWR	≤ 1.5
Max.Power-W	20
Lightning Protection	DC Grounded

Mechanical Specifications	
Connector	RPSMA Bend male or Customized
Connector Position	Cable outgoing
Cable Length-CM	20CM or Customized
Dimension-MM	About 70×70×15
Weight-G	About 70
Radome material	ABS
Radome color	White
Operational Temperature-°C	-40 to 60
Storage Temperature-°C	-55 to 85
Relative Humidity-%	5 to 95
Mounting way	Embedded installation of switch box



Installation Demonstrations

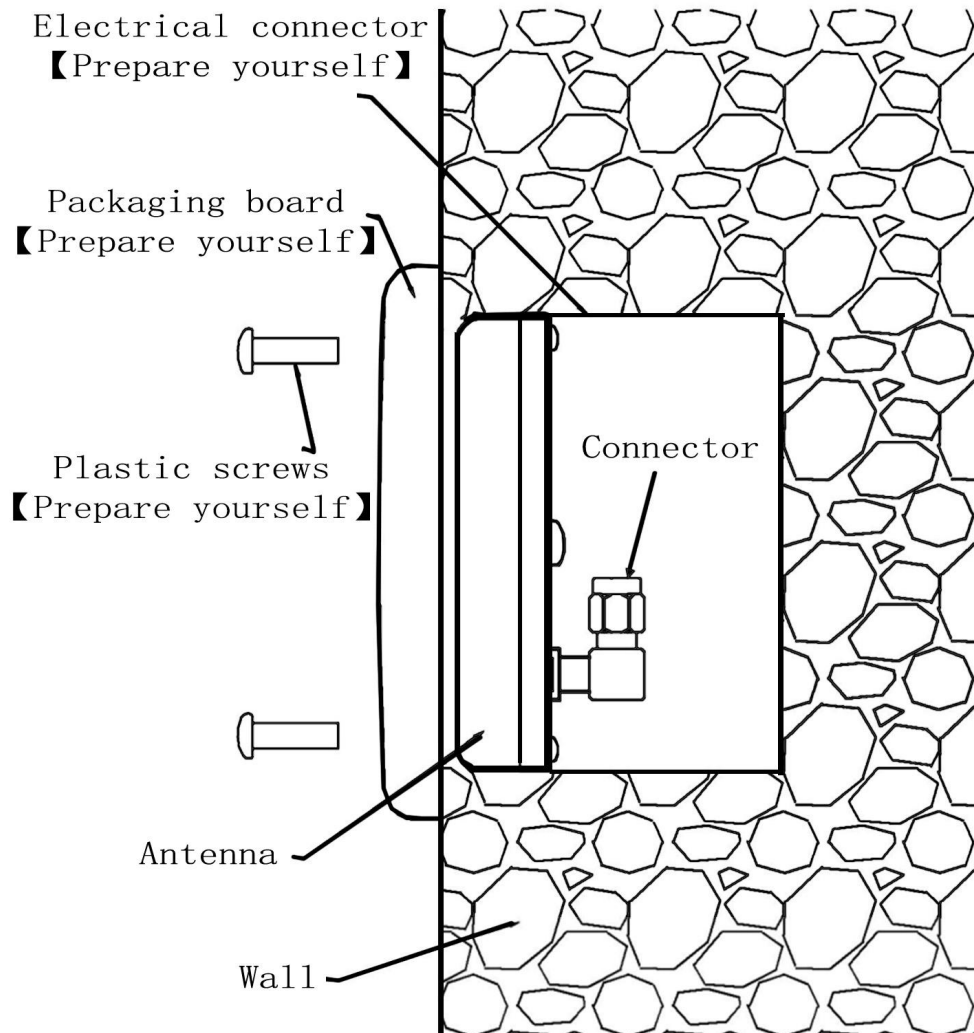

Typical pattern

