



## Camouflage Antenna



- Model: FTD-24MHKG08V80
- Name: Camouflage Antenna
- Freq.Range: 2400 to 2500 MHz
- Communications system:  
2.4GHz WLAN/WIFI/ISM/RFID,  
Spread Spectrum Communication,  
Indoor distributed communication system
- Application scenario:  
Wireless data and image transmission,  
Public wireless hotspot coverage,  
Indoor signal directional coverage,  
IEEE802.11b/g

Tip: Pictures are for reference only.  
Please refer to physical objects.

### Electrical Specifications


Freq.Range-MHz	2400 to 2500
Bandwidth-MHz	100
Polarization	Vertical
Gain-dBi	8
Beam Electrical Downtilt-°	0
Half-power beam width-°	H:85 E:55
F/B-dB	≥ 20
Impedance-Ω	50
VSWR	≤ 1.5
Max.Power-W	20
Lightning Protection	DC Grounded

### Mechanical Specifications

Connector	RPTNC male or Customized
Connector Position	Cable outgoing
Cable Length-CM	20CM or Customized
Dimension-MM	About 87×87×45
Weight-G	About 130
Radome material	ABS
Radome color	White
Operational Temperature-°C	-40 to 60
Storage Temperature-°C	-55 to 85
Relative Humidity-%	5 to 95
Mounting way	Screwed to the wall



## Installation Demonstrations

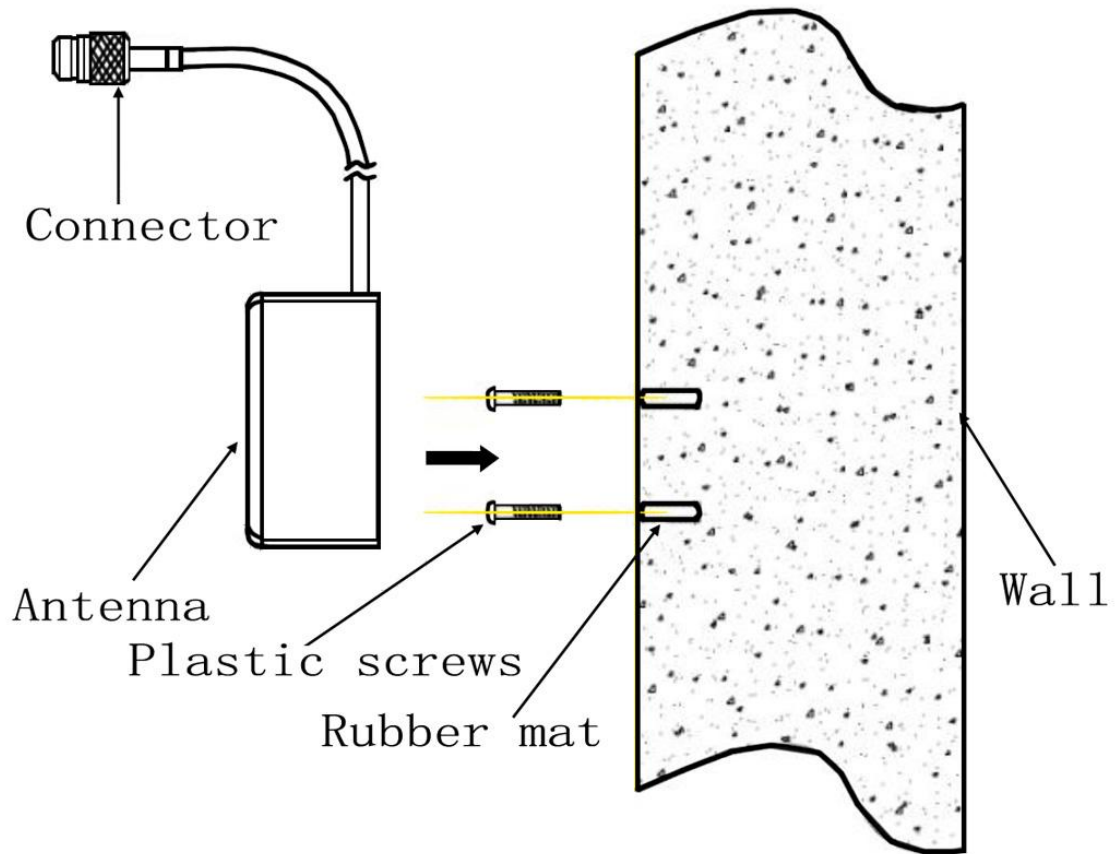

## Typical pattern

