




Omnidirectional Fiberglass Antenna

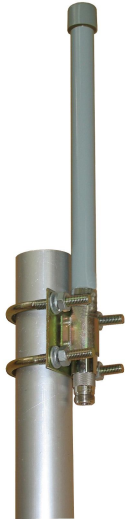

- Model: FTQ-2527QX08A
- Name: Omnidirectional Fiberglass Antenna
- Freq.Range: 2500 to 2700 MHz
- Communications system:
 - MMDS Wireless digital television system,
 - Microwave communication system
- Application scenario:
 - Point to multipoint, Base station antenna,
 - Outdoor signal omnidirectional coverage,
 - Wireless data and image transmission

Tip: Pictures are for reference only.
Please refer to physical objects.

Electrical Specifications	
Freq.Range-MHz	2500 to 2700
Bandwidth-MHz	200
Polarization	Vertical
Gain-dBi	8
Horizontal Beamwidth-°	360
Vertical Beamwidth-°	16
Impedance-Ω	50
VSWR	≤ 1.7
Max.Power-W	50

Mechanical Specifications	
Connector	N female
Connector Position	Bottom
Dimension-MM	About Φ20×565
Weight-KG	About 0.8
Radome material	Fiberglass
Radome color	Gray
Operational Temperature-°C	-40 to 60
Storage Temperature-°C	-55 to 85
Relative Humidity-%	5 to 95
Rated Wind Velocity-M/S	60
Mounting way	Mast
Mast Diameter-MM	Φ40 to 50



Installation Demonstrations

