



## Directional Flat Panel Antenna



- Model: FTD-5158PB16VH30D-1
- Name: Directional Flat Panel Antenna
- Freq.Range: 5150 to 5850 MHz
- Communications system:  
5.1 to 5.8GHz WLAN/WIFI/ISM/UNII,  
5.1 to 5.8GHz Spread Spectrum Communication
- Application scenario:  
Wireless data and image transmission,  
IEEE802.11a/n

Tip: Pictures are for reference only.  
Please refer to physical objects.

### Electrical Specifications


Freq.Range-MHz	5150 to 5850
Bandwidth-MHz	700
Polarization	Vertical and Horizontal
Gain-dBi	16
Beam Electrical Downtilt-°	0
Half-power beam width-°	H:30 E:15
Cross-pol-isolation-dB	≥ 28
F/B-dB	≥ 25
Impedance-Ω	50
VSWR	≤ 2.0
Max.Power-W	50
Lightning Protection	DC Grounded

### Mechanical Specifications

Connector	2×N female
Connector Position	Back
Dimension-MM	About 190×190×40
Weight-KG	About 1
Radome material	ABS
Radome color	White
Mechanical tilt-°	Can not be adjusted
Operational Temperature-°C	-40 to 60
Storage Temperature-°C	-55 to 85
Relative Humidity-%	5 to 95
Rated Wind Velocity-M/S	60
Mounting way	Bolt fixing



## Installation Demonstrations

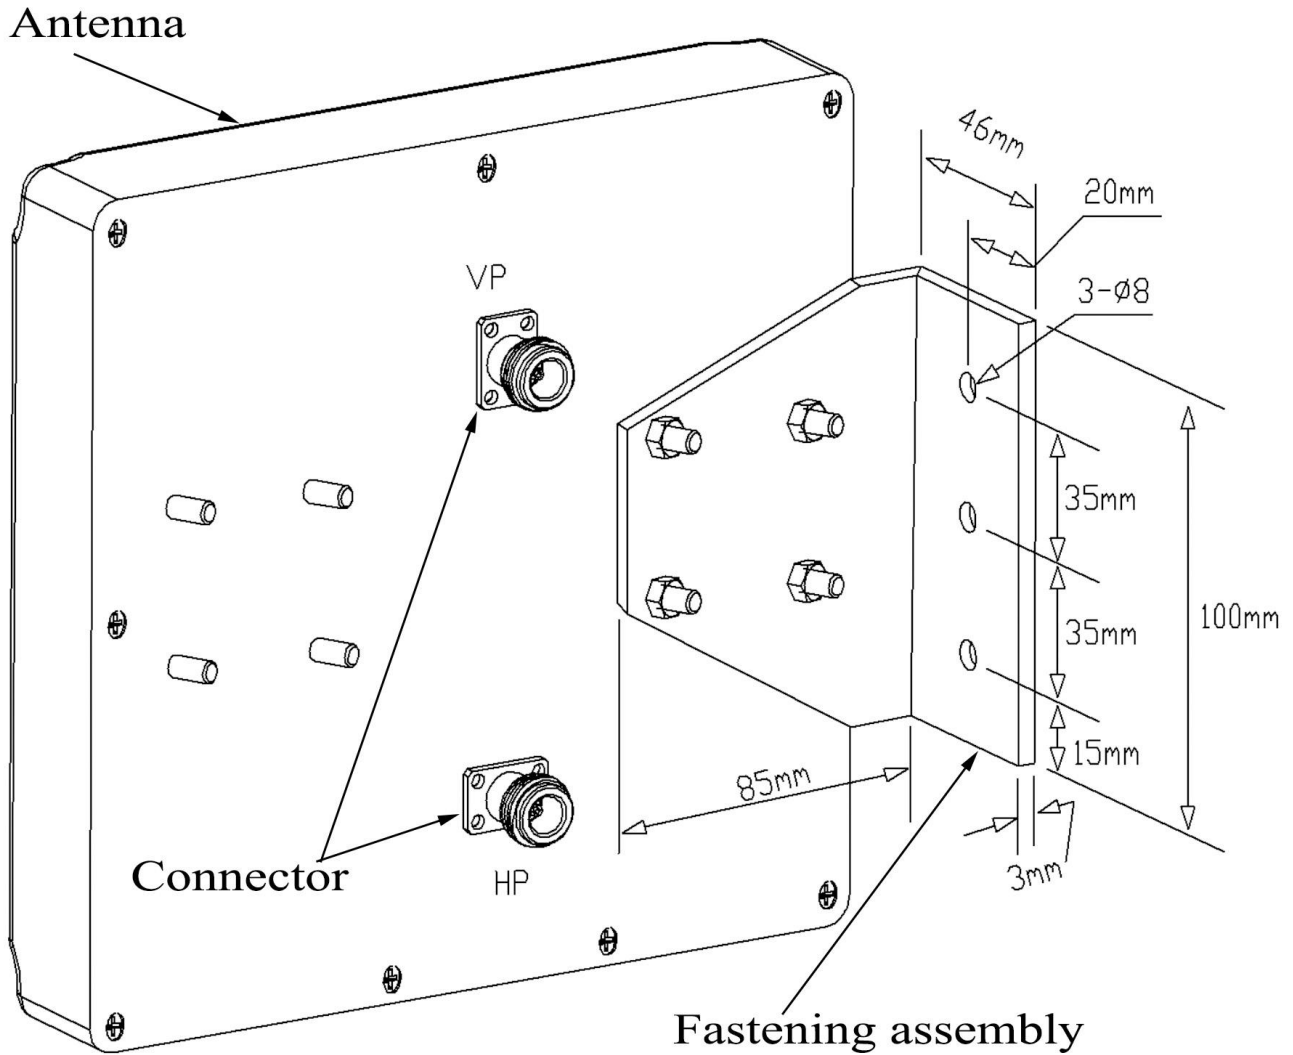

## Typical pattern & Communication channel

