




Microstrip Structure Two-Power Divider

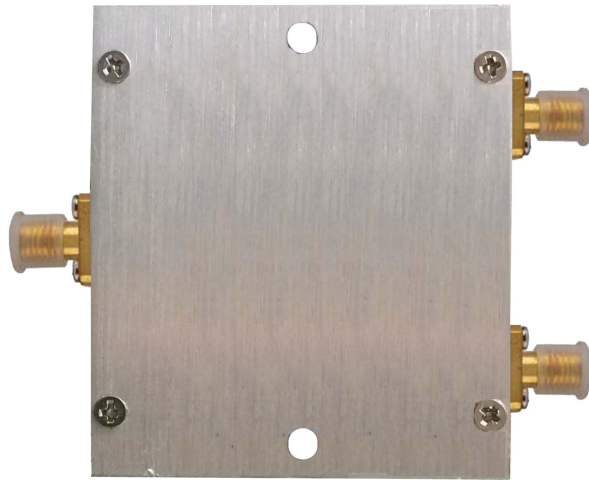

Tip: Pictures are for reference only.
Please refer to physical objects.

Specifications	
Model	GFQ-1727-2AS
Freq.Range-MHz	1700 to 2700
Bandwidth-MHz	1000
Impedance- Ω	50
VSWR	≤ 1.5
Insert Loss-dB[Include Distribution Ratio]	≤ 3.5 [In-Out]
Flatness In Band-dB	≤ 0.5
Cross-pol-isolation-dB	≥ 20 [Out-Out]
Max.Power-W	50
Connector	3×SMA Female
Dimension	About 75×63×20
Weight-KG	About 0.15
Operating Temperature- $^{\circ}\text{C}$	-45 to 65
Storage Temperature- $^{\circ}\text{C}$	-55 to 85
Relative Humidity-%	5 to 95