




## Microstrip Structure Two-Power Divider

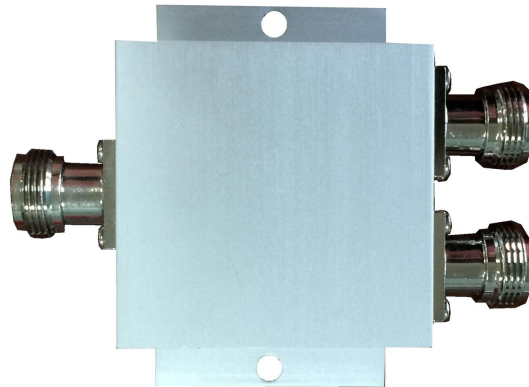

Tip: Pictures are for reference only.  
Please refer to physical objects.

| Specifications                             |                     |              |
|--|---------------------|--------------|
| Model                                      | GFQ-2458-2BN        |              |
| Freq.Range-MHz                             | 2400 to 2500        | 5150 to 5850 |
| Bandwidth-MHz                              | 100                 | 700          |
| Impedance- $\Omega$                        | 50                  |              |
| VSWR                                       | $\leq 1.3$          | $\leq 1.5$   |
| Insert Loss-dB[Include Distribution Ratio] | $\leq 3.5$ [In-Out] |              |
| Flatness In Band-dB                        | $\leq 0.5$          |              |
| Cross-pol-isolation-dB                     | $\geq 20$ [Out-Out] |              |
| Max.Power-W                                | 50                  |              |
| Connector                                  | 3×N Female          |              |
| Dimension                                  | About 92×73×22      |              |
| Weight-KG                                  | About 0.17          |              |
| Operating Temperature- $^{\circ}\text{C}$  | -45 to 65           |              |
| Storage Temperature- $^{\circ}\text{C}$    | -55 to 85           |              |
| Relative Humidity-%                        | 5 to 95             |              |