




Microstrip Structure Three-Power Divider

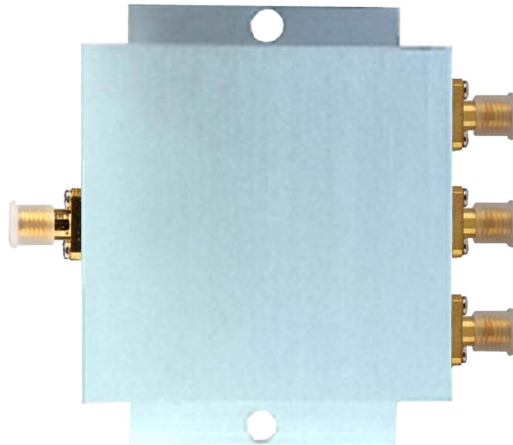

Tip: Pictures are for reference only.
Please refer to physical objects.

| Specifications | |
|--|---------------------|
| Model | GFQ-2400-3BS |
| Freq.Range-MHz | 2400 to 2500 |
| Bandwidth-MHz | 100 |
| Impedance- Ω | 50 |
| VSWR | ≤ 1.3 |
| Insert Loss-dB[Include Distribution Ratio] | ≤ 5.3 [In-Out] |
| Flatness In Band-dB | ≤ 0.5 |
| Cross-pol-isolation-dB | ≥ 20 [Out-Out] |
| Max.Power-W | 50 |
| Connector | 4×SMA Female |
| Dimension | About 75×73×21 |
| Weight-KG | About 0.16 |
| Operating Temperature-°C | -45 to 65 |
| Storage Temperature-°C | -55 to 85 |
| Relative Humidity-% | 5 to 95 |