




## Directional Yagi Antenna

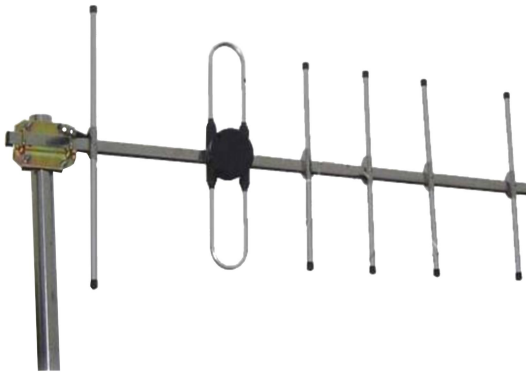

- Model: FTD-0405BM10V06B
- Name: Directional Yagi Antenna
- Freq.Range: 480 to 590 MHz
- Communications system: DTTB, Wireless digital television system
- Application scenario: Point to point, Point to multipoint, Client antenna, Long-distance communication

Tip: Pictures are for reference only.  
Please refer to physical objects.

Electrical Specifications	
Freq.Range-MHz	480 to 590
Bandwidth-MHz	30
Unit	6
Polarization	Vertical or Horizontal
Gain-dBi	10
Vertical Beamwidth-°	50
Horizontal Beamwidth-°	61
F/B-dB	≥ 15
Impedance-Ω	50
VSWR	≤ 1.5
Max.Power-W	100

Mechanical Specifications	
Connector	N female or customized
Connector Position	Cable outgoing
Length-M	About 1
Weight-KG	About 0.6
Radome material	Aluminium alloy
Operational Temperature-°C	-40 to 60
Storage Temperature-°C	-55 to 85
Relative Humidity-%	5 to 95
Rated Wind Velocity-M/S	60
Mounting way	Mast
Mast Diameter-MM	About Φ40 to 50



## Installation Demonstrations

