




Directional Yagi Antenna

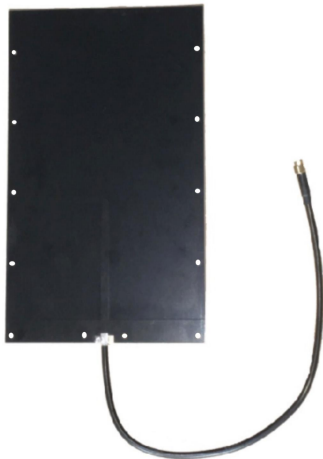

- Model: FTD-915BM07V04B
- Name: Directional Yagi Antenna
- Freq.Range: 902 to 928 MHz
- Communications system: RFID,
Radio Frequency Identification
- Application scenario: Point to point

Tip: Pictures are for reference only.
Please refer to physical objects.

Electrical Specifications	
Freq.Range-MHz	902 to 928
Bandwidth-MHz	26
Unit	4
Polarization	Vertical or Horizontal
Gain-dBi	7
Horizontal Beamwidth-°	100
Vertical Beamwidth-°	70
F/B-dB	≥ 15
Impedance-Ω	50
VSWR	≤ 1.5
Max.Power-W	50

Mechanical Specifications	
Connector	SMA male or customized
Connector Position	Cable outgoing
Dimension-MM	About 190×140
Weight-G	About 200
Radome material	PCB
Radome color	Black
Operational Temperature-°C	-40 to 60
Storage Temperature-°C	-55 to 85
Relative Humidity-%	5 to 95
Mounting way	Built-in