



Directional Flat Panel Antenna



- Model: FTD-3742PB17V30A
- Name: Directional Flat Panel Antenna
- Freq.Range: 3750 to 4250 MHz
- Communications system:
 - UWB Radio positioning system
- Application scenario:
 - Point to point, Point to multipoint,
 - Wireless data and image transmission,
 - Outdoor signal directional coverage


Tip: Pictures are for reference only.
Please refer to physical objects.

Electrical Specifications	
Freq.Range-MHz	3750 to 4250
Bandwidth-MHz	500
Polarization	Vertical
Gain-dBi	17
Beam Electrical Downtilt-°	0
Half-power beam width-°	H:32 E:13
F/B-dB	≥ 25
Impedance-Ω	50
VSWR	≤ 2.0
Max.Power-W	50
Lightning Protection	DC Grounded

Mechanical Specifications	
Connector	N female
Connector Position	Back
Dimension-MM	About 280×190×25
Weight-KG	About 1.5
Radome material	ABS
Radome color	White
Mechanical tilt-°	-30 to 30
Operational Temperature-°C	-40 to 60
Storage Temperature-°C	-55 to 85
Relative Humidity-%	5 to 95
Rated Wind Velocity-M/S	60
Mounting way	Mast
Mast Diameter-MM	Φ40 to 50



Installation Demonstrations

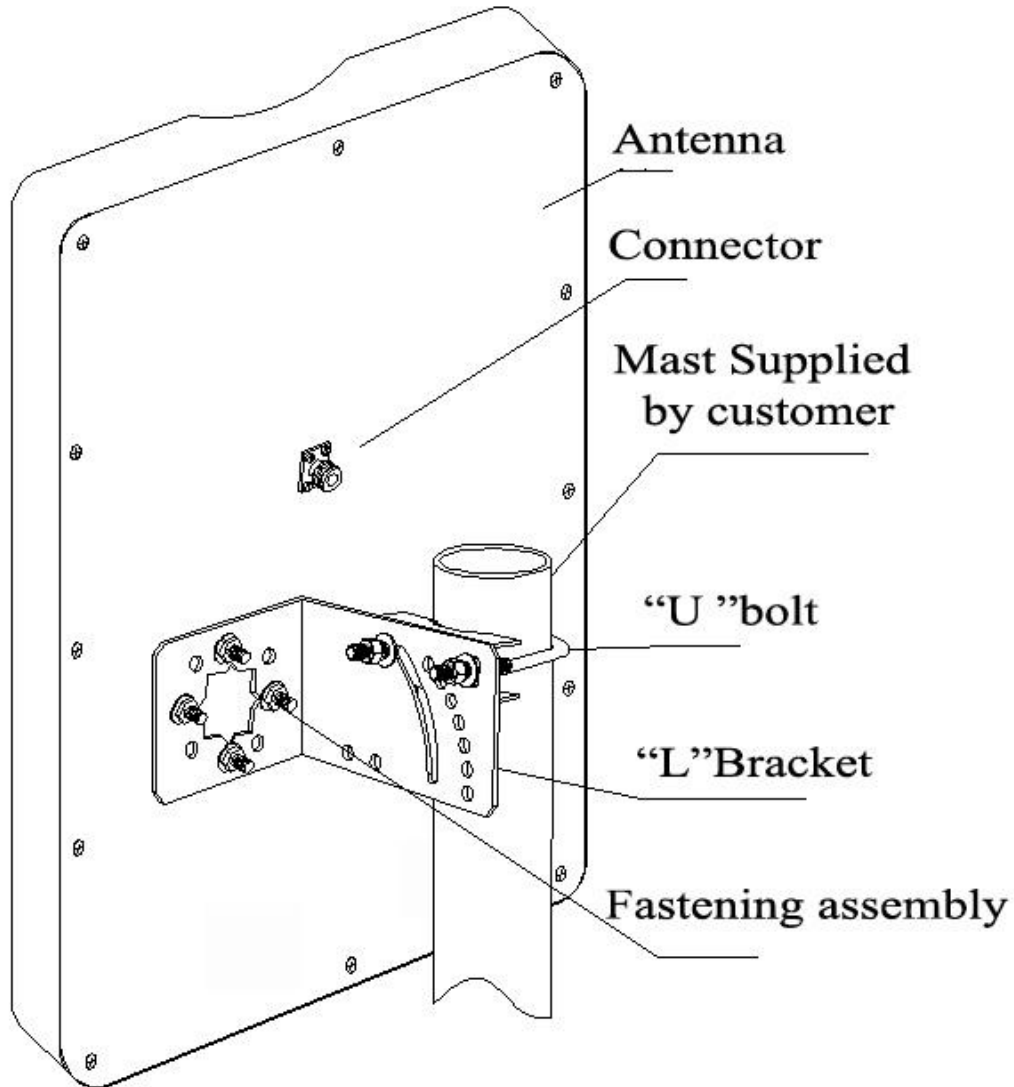

Typical pattern

